

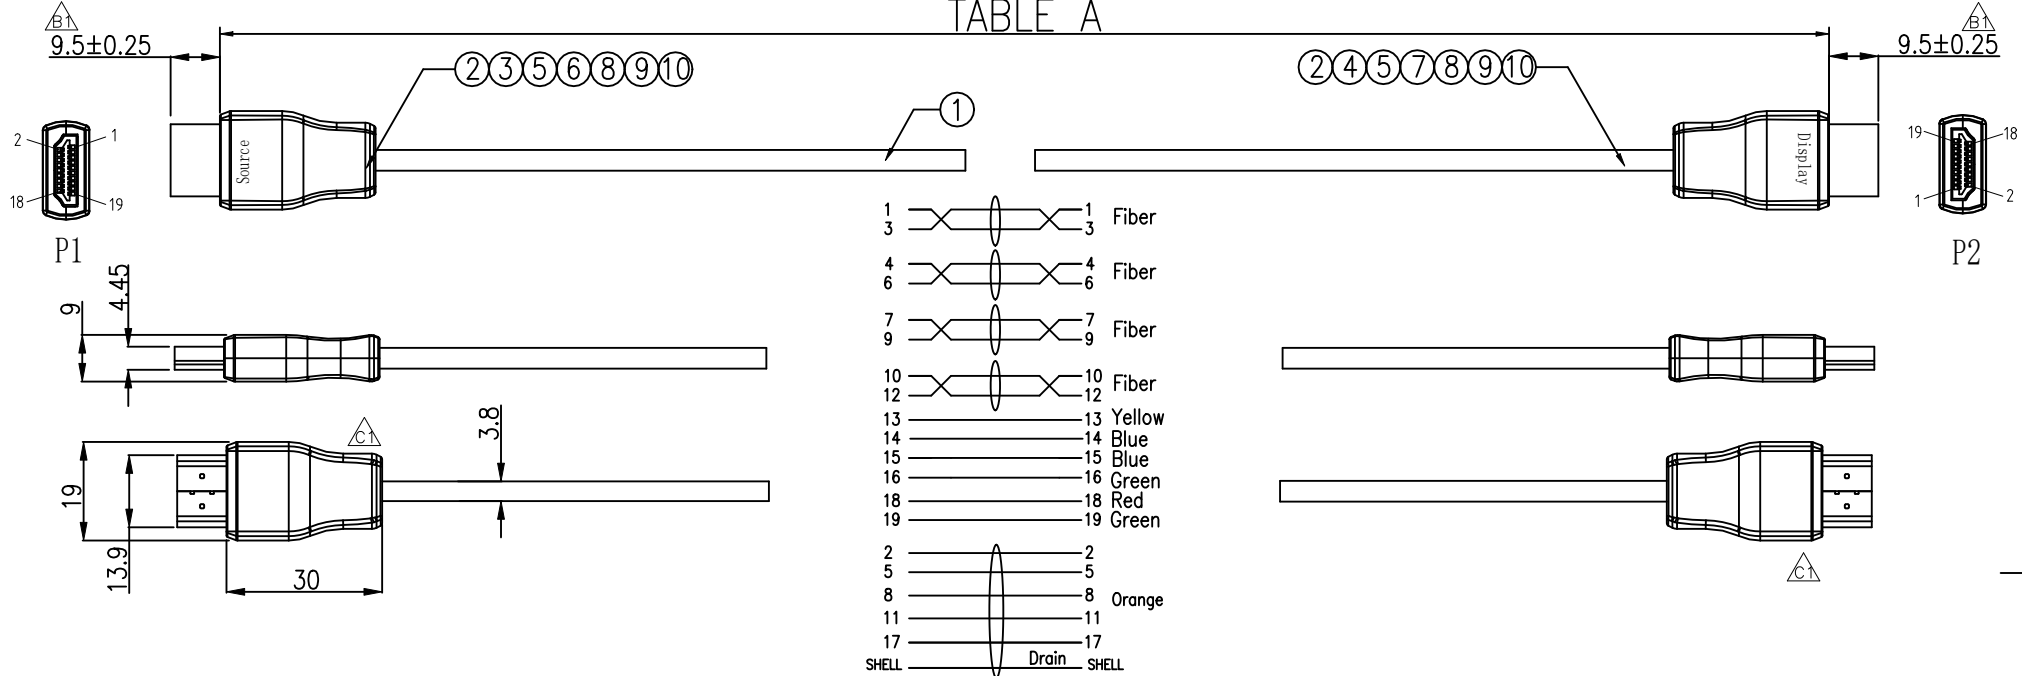


TABLE A

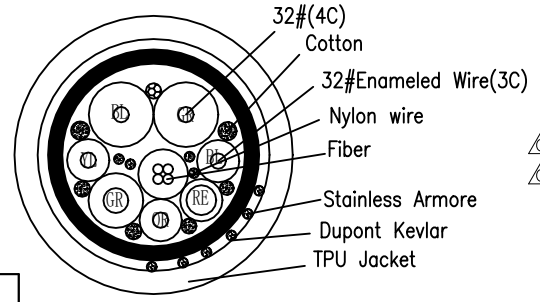

NOTES:
 3840x2160@60Hz
 Support 18Gbps 4:4:4
 Support Max Length 30M



JPC P/N	Length(mm)
PK3H2U00AA03-D	5000+300/-0
PK3H2U00AA03-E	7000+300/-0
PK3H2U00AA03-F	8000+300/-0
PK3H2U00AA03-1	10000+300/-0
PK3H2U00AA03-2	15000+375/-0
PK3H2U00AA03-3	20000+450/-0
PK3H2U00AA03-4	25000+525/-0
PK3H2U00AA03-5	30000+600/-0

ITEM	SPECIFICATION	Q'TY	UNIT
10	Screw	4	PC
9	Cable Clips	2	PC
8	Protective Cap	2	PC
7	HDMI A male Shell(bottom) Black(Display)	1	PC
6	HDMI A male Shell(bottom) Black(Source)	1	PC
5	HDMI A male Shell(Upon) Black	2	PC
4	HDMI A PCBA (Display)	1	PC
3	HDMI A PCBA (Source)	2	PC
2	HDMI A male Gold Plated	2	PC
1	(32AWG*4C+Enameled Wire*3+Optical Fiber+F+P+Stainless Amored+F OD:3.8	TABLE A	mm

RoHS COMPLIANT	Unit : mm	PROJECTION	JPC connectivity		
	GENERAL TOLERANCES: (UNLESS SPECIFIED)	D.R. 10/22/2020			
	0 = ±.50	Rory	TITLE	HDMI 2.0 Active Optical Cable Armored, OD3.8mm	DWG NO. TP0113
	0.0 = ±.25	CHK	SCALE	1:1	SIZE
0.00 = ±.15	APV.D	PART NO.	PK3H2U00AA03-x	REV. C1	SHEET 1 OF 1
0.000 = ±.05					
0 = ±.2					
0.0 = ±.1					