



THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.(JPC)

CUSTOMER DRAWING

REV.	ECN NO.	DESCRIPTION	MDF'D	APP'D	DATE
01		INITIAL DESIGN	Lance	Richard	12/14/2020
02					
03					

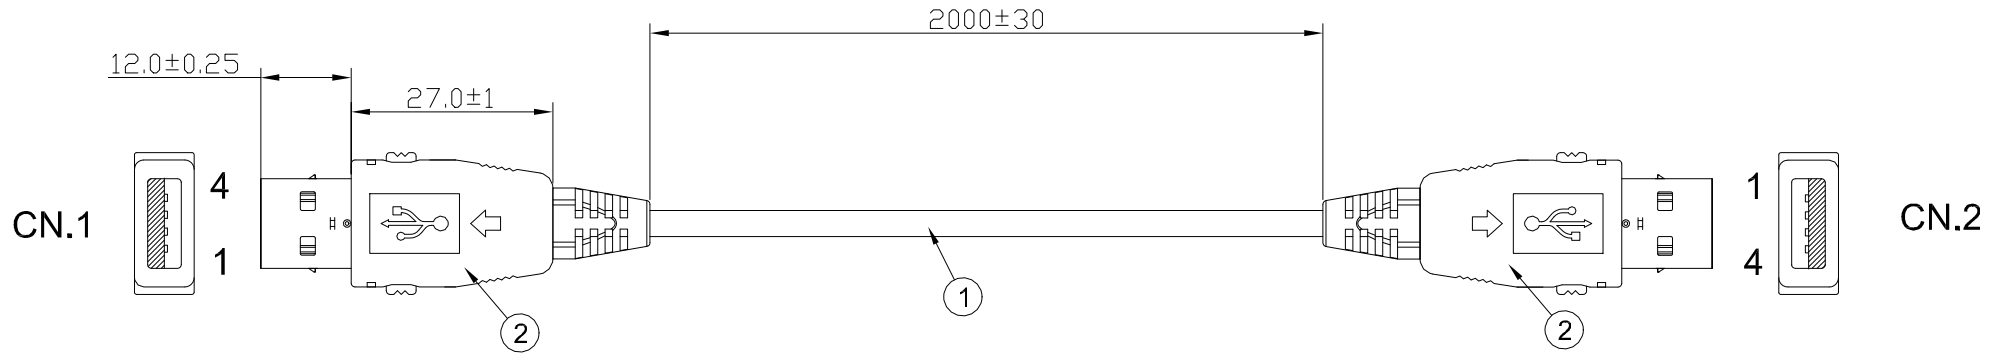

Pin Connection

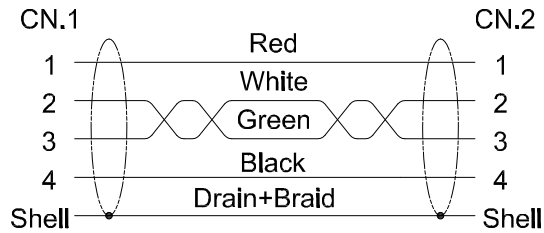

Notes:

- a. Electrical test:
 1. 100% Open & Short & Mismatch test;
 2. Conduction Resistance: 5 ohm (Max.);
 3. Insulation Resistance: 10M ohm (min.);
 4. Withstand Voltage: DC 300V ;
- b. Materials and finish must comply with RoHS directive 2011/65/EU.

2	Connector	USB A Male, G/F,Nickel shell, White Insulation,Assembly type,Black cover	2	PCS
1	Cable	UL2725 28AWGx1P+28AWGx2C+AEB,Black PVC Jacket, OD:3.5mm	A/R	mm
ITEM	NAME	DESCRIPTION	Q'TY	U/M

RoHS COMPLIANT	Unit : mm	PROJECTION 	JPC connectivity		
	GENERAL TOLERANCES: (UNLESS SPECIFIED)	D.R. 12/14/2020 Lance			TITLE USB A/M TO USB A/M L=2000mm
	0 = ±.50 0.0 = ±.25 0.00 = ±.15 0.000 = ±.05 0° = ± 2° 0.0° = ± 1°	CH.K 12/14/2020 Albert	SCALE	SIZE	DWG NO.
		APV.D 12/14/2020 Richard	1:1	A4	PK3U2EE01101-1
				REV. 01	
				SHEET 1 OF 1	