




**RoHS COMPLIANT**

LENGTH

MDR26 MALE




MDR26 MALE



P2

**PIN ASSIGNMENT**

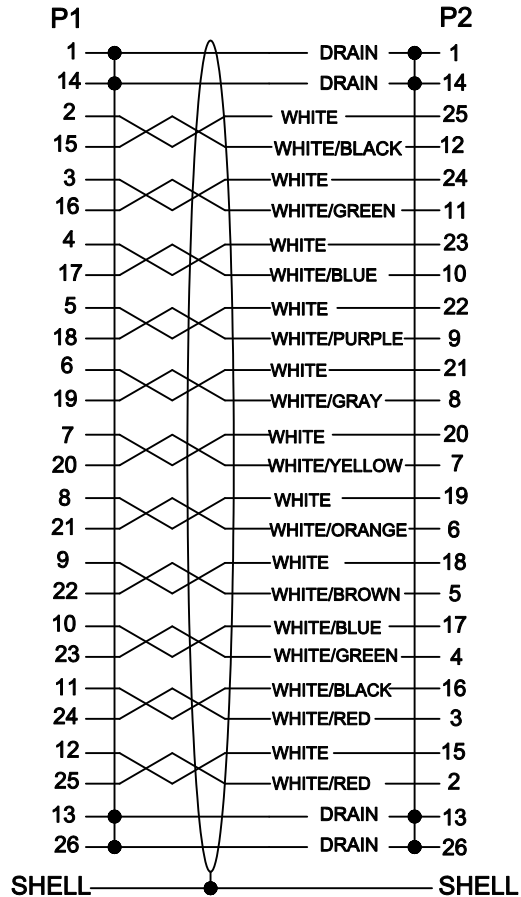

|                       |   |                           |       |                         |  |   |  |                          |  |
|-----------------------|---|---------------------------|-------|-------------------------|--|---|--|--------------------------|--|
| <b>RoHS COMPLIANT</b> | Unit : mm                                 | PROJECTION<br>            |       | <b>JPC connectivity</b> |  | TITLE<br><b>MDR to MDR Standard Cable</b> |  | PRODUCT NO.<br>OR LAYOUT |  |
|                       | GENERAL TOLERANCES:<br>(UNLESS SPECIFIED) | D.R. 10/14/2019<br>Jansen | SCALE |                         |  |   |  | REV. 01                  |  |
|                       | 0 = ±.50                                  | CH.K 10/14/2019<br>Albert | SIZE  | PART NO.                |  | SHEET OF 1                                |  |                          |  |
|                       | 0.0 = ±.25                                | APV.D 10/14/2019<br>Ray   | N/A   | A4                      |  |   |  |                          |  |
|                       | 0.00 = ±.15                               |                           |       |                         |  |   |  |                          |  |
| 0.000 = ±.05          |   |                           |       |                         |  |   |  |                          |  |
| 0" = ± 2'             |   |                           |       |                         |  |   |  |                          |  |
| 0.0" = ± 1'           |   |                           |       |                         |  |   |  |                          |  |