

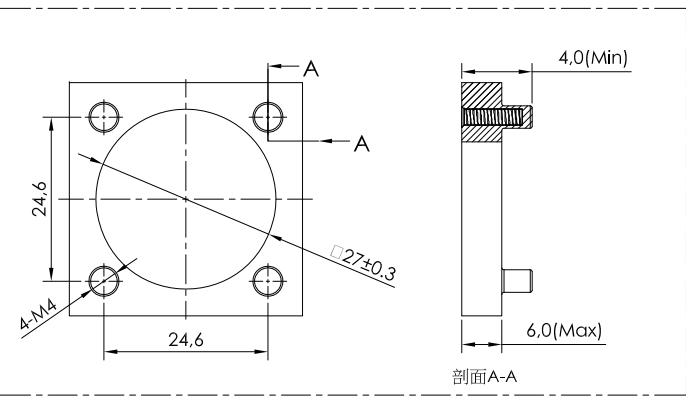


訂購信息 Ordering Informating

XL183X	— 400 —	XX
鍵位 "X" "Y" "Z" "W" "N"	高壓互鎖 0,帶高壓互鎖 1,不帶高壓互鎖	線纜大小 "2.5"=2.5mm <sup>2</sup> "4"=4.0mm <sup>2</sup>



開孔面板尺寸信息

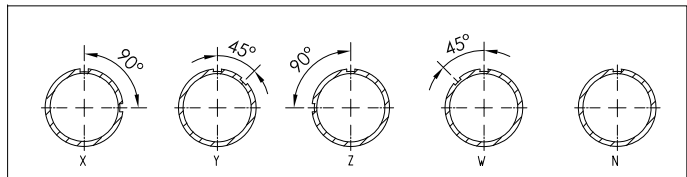

M方向鍵位示意圖

Standard Part List(With HVIL)

Standard Part List(Without HVIL)

Model NO.	JPC NO.	Polarization	Cable Size(mm <sup>2</sup> )
XL083X-401-2.5	PD8FX11X03W0-0	X	2.5
XL083Y-401-2.5	PD8FY11X03W0-0	Y	2.5
XL083Z-401-2.5	PD8FZ11X03W0-0	Z	2.5
XL083W-401-2.5	PD8FW11X03W0-0	W	2.5
XL083N-401-2.5	PD8FN11X03W0-0	N	2.5
XL083X-401-4	PD8FX12X03W0-0	X	4
XL083Y-401-4	PD8FY12X03W0-0	Y	4
XL083Z-401-4	PD8FZ12X03W0-0	Z	4
XL083W-401-4	PD8FW12X03W0-0	W	4
XL083N-401-4	PD8FN12X03W0-0	N	4

Model NO.	JPC NO.	Polarization	Cable Size(mm <sup>2</sup> )
XL083X-400-2.5	PD8FX01X03W0-0	X	2.5
XL083Y-400-2.5	PD8FY01X03W0-0	Y	2.5
XL083Z-400-2.5	PD8FZ01X03W0-0	Z	2.5
XL083W-400-2.5	PD8FW01X03W0-0	W	2.5
XL083N-400-2.5	PD8FN01X03W0-0	N	2.5
XL083X-400-4	PD8FX02X03W0-0	X	4
XL083Y-400-4	PD8FY02X03W0-0	Y	4
XL083Z-400-4	PD8FZ02X03W0-0	Z	4
XL083W-400-4	PD8FW02X03W0-0	W	4
XL083N-400-4	PD8FN02X03W0-0	N	4

規格參數:

- 工作溫度Operating temperature:-40°C~+125°C.
- 額定電流Current rating:2.5mm<sup>2</sup>:23A;4.0mm<sup>2</sup>:32A.
- 額定電壓Operating voltage:630VDC/400VAC.
- 耐電壓Dielectric withstanding voltage:4000VDC.
- 防護等級Protection class:IP67(mated).
- 機械壽命Mating cycle:100Min.
- 絕緣電阻Insulation resistance:2000MΩ Min(25°C)
- 配對插頭Mating plug:PD8MX11X03W0-0

備註 (Note):

印字內容如下

XL0830-200-0 YYWW

連接器型號 "YY"為年份，取後面兩位 "WW"為周數

RoHS COMPLIANT	HALOGEN FREE	Unit : mm	PROJECTION	<b>JPC connectivity</b>	
		GENERAL TOLERANCES: (UNLESS SPECIFIED)			
		0 = ±.50 0.0 = ±.25 0.00 = ±.15 0.000 = ±.05 0" = ±.2" 0.0" = ±.1"	D.R. 05/15/2022 Chunxia CH.K 05/15/2022 Andrew APV.D 05/15/2022 Richard	TITLE XL403插座	PD./FILE NO. ---
				SCALE 1:1 SIZE A4 PART NO. PD8FX11X03W0-0	REV. 01 SHEET 1 OF 1