THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.(JPC)

CUSTOMER DRAWING

DRWC-003165

REV.	ECN NO.	DESCRIPTION	MDF'D	APP'D	DATE
01	---	INITIAL DESIGN	Chunxia	Richard	05/15/2022

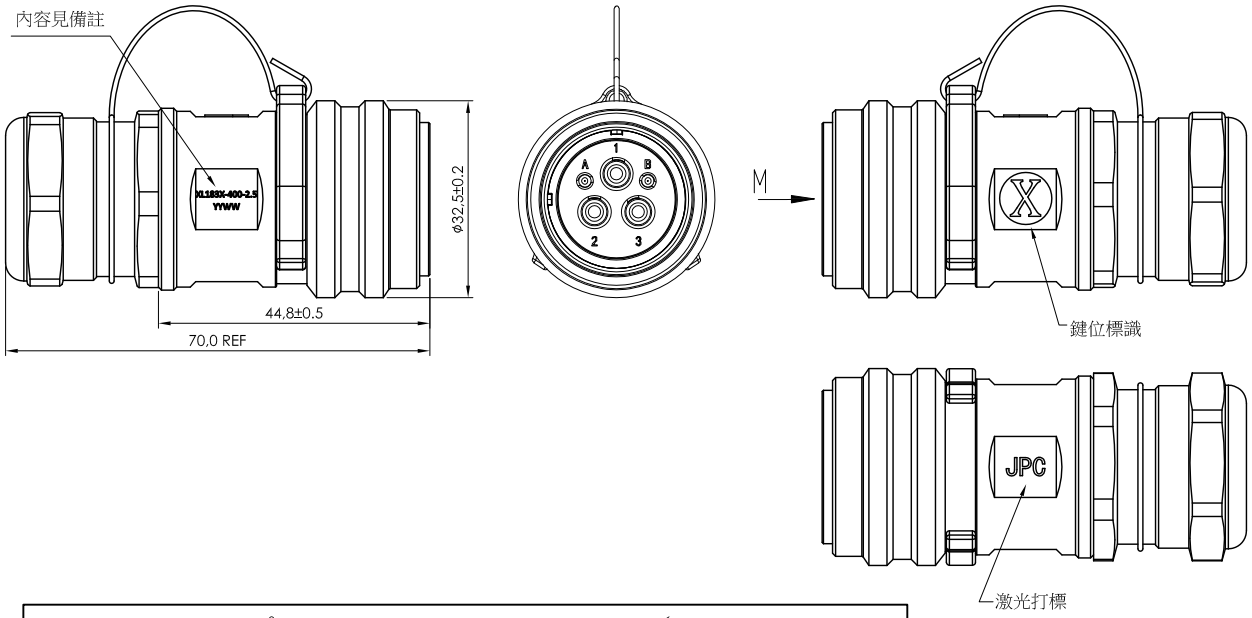

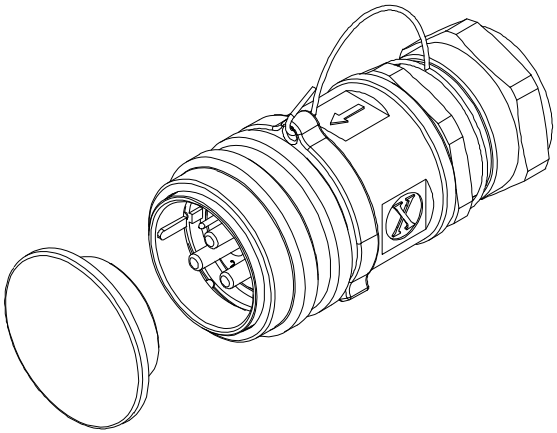

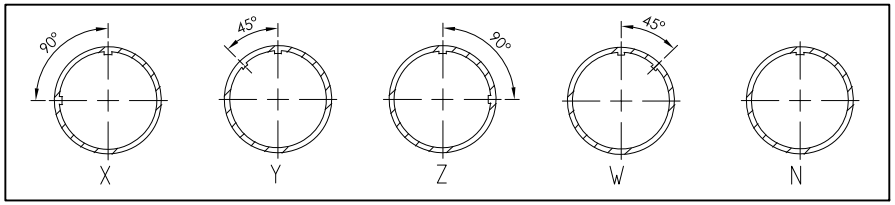

M方向鍵位示意圖

訂購信息 Ordering Informating

XL183() — 400 — XX

鍵位	高壓互鎖	線纜大小
"X"	0,帶高壓互鎖	"2.5"=2.5mm²
"Y"	1,不帶高壓互鎖	"4"=4.0mm²
"Z"		
"W"		
"N"		

規格參數:

1.工作溫度Operating temperature:-40°C~+125°C.
2.額定電流Current rating:2.5mm²:23A;4.0mm²:32A.
3.額定電壓Operating voltage:630VDC/400VAC.
4.耐電壓Dielectric withstanding voltage:4000VDC.
5.防護等級Protection class:IP67(mated).
6.機械壽命Mating cycle:100Min.
7.絕緣電阻Insulation resistance:2000MΩ Min(25°C).
8.配對插座Mating receptacle:PD8FX11X03W0-0.

備註(Note):

印字內容如下

XL183()-200-() YYWW

連接器型號

"YY"為年份,取後面兩位
"WW"為周數

Standard Part List(With HVIL)

Model NO.	JPC NO.	Polarization	Cable Size(mm²)
XL183X-401-2.5	PD8MX11X03W0-0	X	2.5
XL183Y-401-2.5	PD8MY11X03W0-0	Y	2.5
XL183Z-401-2.5	PD8MZ11X03W0-0	Z	2.5
XL183W-401-2.5	PD8MW11X03W0-0	W	2.5
XL183N-401-2.5	PD8MN11X03W0-0	N	2.5
XL183X-401-4	PD8MX12X03W0-0	X	4
XL183Y-401-4	PD8MY12X03W0-0	Y	4
XL183Z-401-4	PD8MZ12X03W0-0	Z	4
XL183W-401-4	PD8MW12X03W0-0	W	4
XL183N-401-4	PD8MN12X03W0-0	N	4

Standard Part List(Without HVIL)

Model NO.	JPC NO.	Polarization	Cable Size(mm²)
XL183X-400-2.5	PD8MX01X03W0-0	X	2.5
XL183Y-400-2.5	PD8MY01X03W0-0	Y	2.5
XL183Z-400-2.5	PD8MZ01X03W0-0	Z	2.5
XL183W-400-2.5	PD8MW01X03W0-0	W	2.5
XL183N-400-2.5	PD8MN01X03W0-0	N	2.5
XL183X-400-4	PD8MX02X03W0-0	X	4
XL183Y-400-4	PD8MY02X03W0-0	Y	4
XL183Z-400-4	PD8MZ02X03W0-0	Z	4
XL183W-400-4	PD8MW02X03W0-0	W	4
XL183N-400-4	PD8MN02X03W0-0	N	4

RoHS COMPLIANT

HALOGEN FREE

Unit : mm

GENERAL TOLERANCES: (UNLESS SPECIFIED)
0 = ±.50
0.0 = ±.25
0.00 = ±.15
0.000 = ±.05
0° = ± 2°
0.0° = ± 1°

PROJECTION

D.R. 05/15/2022 Chunxia
CH.K 05/15/2022 Andrew
APV.D 05/15/2022 Richard

JPC connectivity

TITLE: XL403插頭

PD./FILE NO.: ---

SCALE: 1:1 | SIZE: A4 | PART NO.: PD8MX11X03W0-0 | REV. 01 | SHEET 1 OF 1