


## **PSL 200 Solution**

JPC's PSL 200 is a single pole front mounting connector especially developed for Energy Storage System(ESS). Sustainable use of renewable energies can only be achieved through energy storage systems, as they enable time-delayed, demand-oriented use of the new power produced by renewable energy.

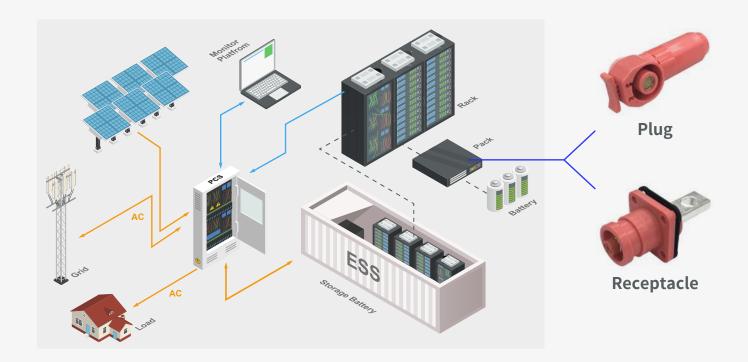

## **PRODUCT FEATURE**

- 1. No tools required to un-mate
- 2. Secondary Lock
- 3. Receptacle is front mounted
- 4. Material flammability rating 94V-0
- 5. RoHS compliant

## PRODUCT APPLICATION

Battery Pack Power Management **ESS** 

## **PRODUCT SPECIFICATION**

1. Operating Temperature: -40°C~125°C

2. Operating Voltage: 1500V DC

3. Dielectric Withstanding Voltage: 3000V DC

4. Current Rating: 200A 5. Durability Cycle: 500









