

1	2	3	4	5	6	7	8				
THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.(JPC)				CUSTOMER DRAWING		REV.	ECN NO.	DESCRIPTION	MDF'D	APP'D	DATE
				DRWC-007738		01		INITIAL DESIGN	Philip	Richard	07/06/2023
						02					
						03					

TABLE A

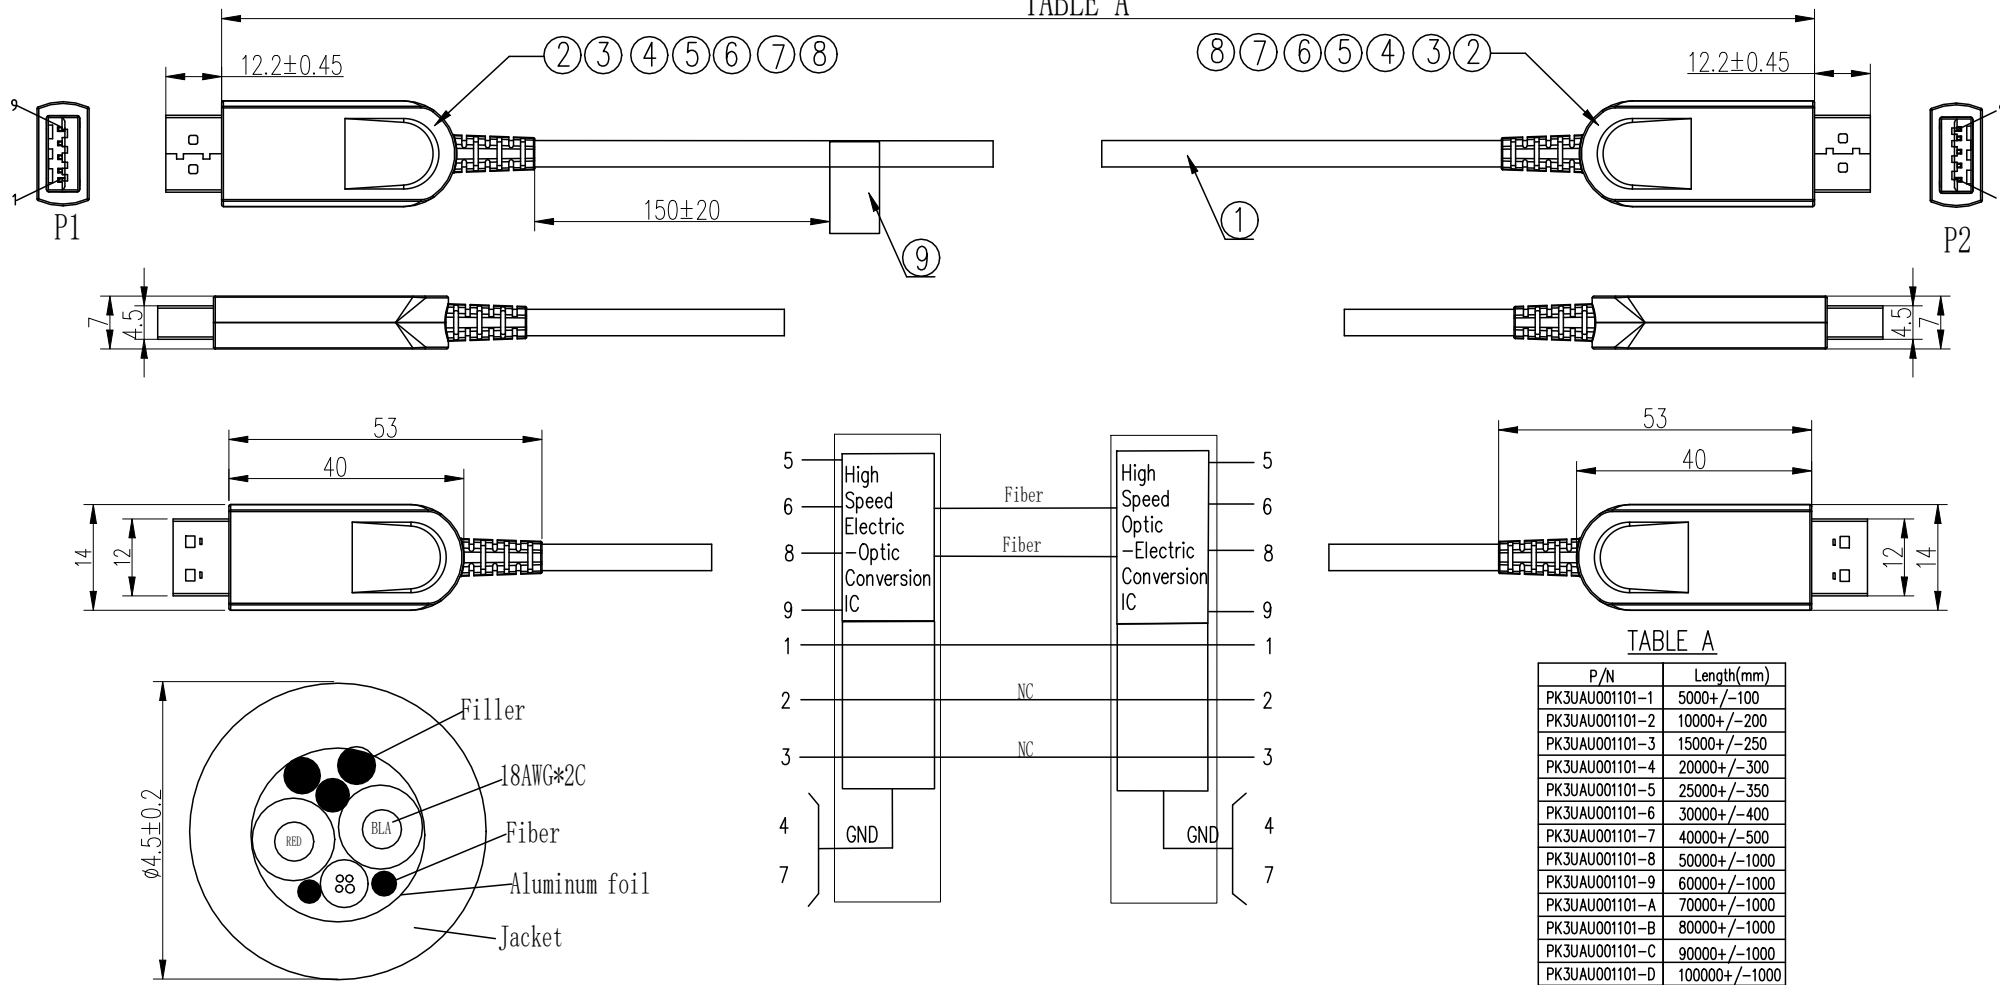


TABLE A

P/N	Length(mm)
PK3UAU001101-1	5000+/-100
PK3UAU001101-2	10000+/-200
PK3UAU001101-3	15000+/-250
PK3UAU001101-4	20000+/-300
PK3UAU001101-5	25000+/-350
PK3UAU001101-6	30000+/-400
PK3UAU001101-7	40000+/-500
PK3UAU001101-8	50000+/-1000
PK3UAU001101-9	60000+/-1000
PK3UAU001101-A	70000+/-1000
PK3UAU001101-B	80000+/-1000
PK3UAU001101-C	90000+/-1000
PK3UAU001101-D	100000+/-1000

9	QR code	1	PCS
8	Screw	4	PCS
7	Clip	2	PCS
6	USB A Male Shell(Bottom) Black	2	PCS
5	USB A Male Shell(Upper) Black	2	PCS
4	SR Black	2	PCS
3	USB A Male PCBA	2	PCS
2	USB A Male	2	PCS
1	USB AOC (4 Fiber+ 2 Copper) Black PVC OD:4.5±0.2MM	TABLE A	mm
ITEM	DESCRIPTION	Q'TY	UNIT

RoHS COMPLIANT

Unit:mm(inch)	PROJECTION	<b>JPC connectivity</b> TITLE USB3.2 Gen 1 Type A (Male) - Type A (Male) AOC Not downward compatible version	PD./FILE NO.
GENERAL TOLERANCES: (UNLESS SPECIFIED) 0 = ±1 (0.039) 0.0 = ±1.5 (0.02) 0.00 = ±.3 (0.012) 0.000 = ±.15 (0.006) 0° = ± 2° 0.0° = ± 1°	D.R. 07/06/2023 Philip CH.K 07/06/2023 Philip APV.D 07/06/2023 Richard		