


1	2	3	4	5	6	7	8		
(M1)	HF-UB0228B	PVC 45P	CUSTOMER DRAWING DRWC-XXXXXX			REV. 01	DESCRIPTION INITIAL DESIGN	MDF'D APP'D Bob Sung	DATE 11/16/2023
(M2)			THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.(JPC)						



NOTE:
 1. TESTING CONDITION
 A. CONDUCTIVE RESISTANCE 1 Ohm Max.
 B. INSULATION RESISTANCE 10M Ohm Min
 WITH DC300V DURING 0.1second

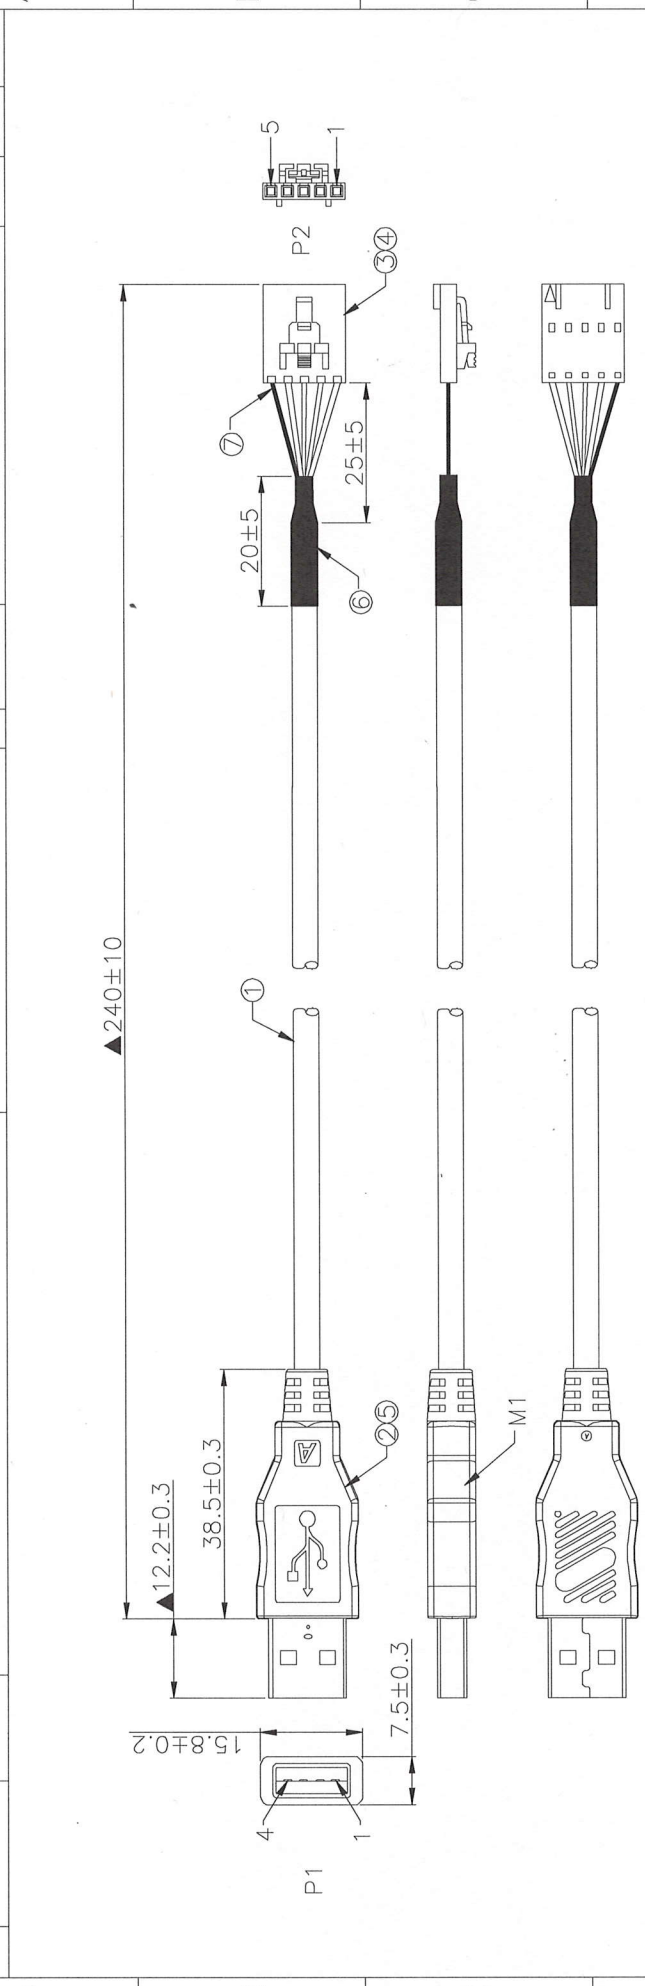

7	HEAT SHRINK TUBE,COLOR:BLACK,UL RECOGNIZED YDPU2 RATED VW-1.	A/R	
6	HEAT SHRINK TUBE,Ø4.5mm,COLOR:BLACK,UL RECOGNIZED YDPU2 RATED VW-1.	A/R	
5	45P PVC COLOR:BLACK	A/R	
4	TER:PHOSPHOR BRONZE AU 30U" PLATED,24-30AWG MOLEX PN:16-02-0083 OR EQUIVALENT	5PCS	
3	HSG:PH2.54 1*5P HSG,GLASS FILLED POLYESTER,UL94V-0 COLOR:BLACK MOLEX PN:50-57-9405 OR EQUIVALENT	1PCS	
2	CONN:(P1)USB A TYPE MALE CONNECTOR,INSULATION:WHITE,CONTACT:COPPER ALLOY,GOLD FLASH,SHELL:STEEL NICKEL PLATED.	1SET	
1	CABLE:UL20276 24AWG*2C+28AWG*1P+AEB 85% JACKET:PVC,COLOR:BLACK,OD4.2±0.15mm	A/R	
ITEM	DESCRIPTION	QTY	

RoHS COMPLIANT

Unit: mm

GENERAL TOLERANCES (UNLESS SPECIFIED)

D.R. 11/16/2023
 Bob
 CHK 11/16/2023
 David
 APV.D 11/16/2023
 Sung

PROJECTION

JPC connectivity

PD./FILE NO.
 JPC-S07154

USB 2.0 AM TO PH2.54 1*5P HSG
 Cable Ass'y L=240mm

PACTECH

PART NO.
 PCB042100696-1

SCALE
 NONE A4

REV. 01

SHEET 1 OF 1