


THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.(JPC)

CUSTOMER DRAWING
DRWC-XXXXXX

REV.	ECN NO.	DESCRIPTION	MDF'D	APP'D	DATE
01		INITIAL DESIGN	Bovan	Max	03/14/2025
02					
03					

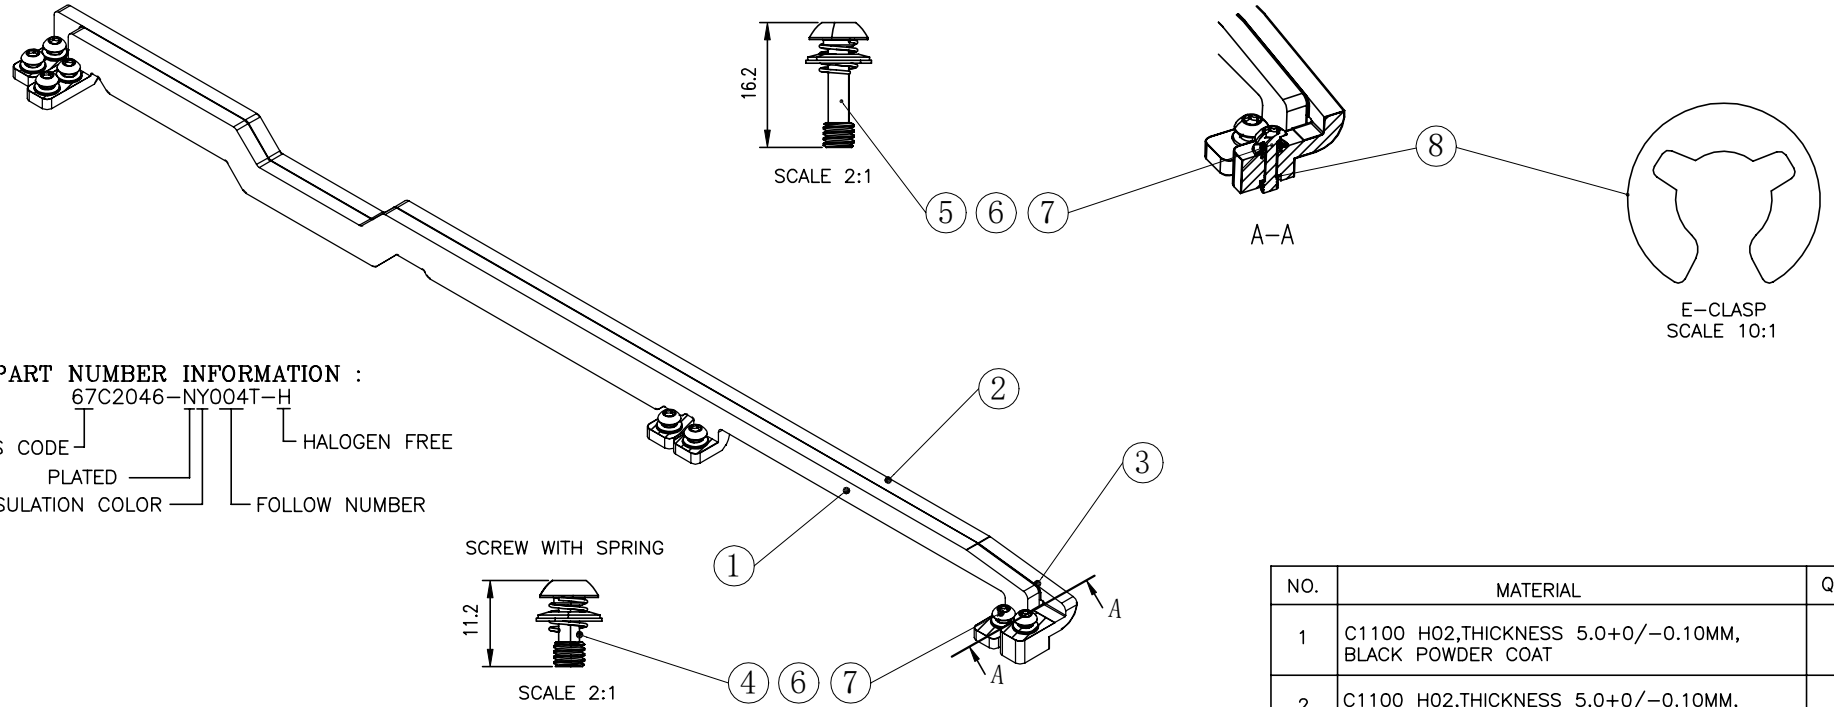

PART NUMBER INFORMATION :
67C2046-NY004T-H

SERIES CODE | PLATED | INSULATION COLOR | HALOGEN FREE | FOLLOW NUMBER

MATERIAL :

- CONDUCTOR: C1100 H02, THICKNESS 5.0/5.0mm.
- INSULATION: ① EPOXY POWDER COATED, THICKNESS: 0.15~0.25mm
COLOR: BLACK,UL94-V0(E481369).
② PI FILM THICKNESS: 0.10~0.20mm COLOR: Amber, UL94-V0(E516522)
- FINISH: MATTE Tin Plated 5~8um Min, over NICKEL Plated 1~2um Min.

NOTE:

- POWDER COATED ALL SURFACES
NON COATED MASK AREA
- ELECTRICAL TEST:100% HI-POT TEST 1000VDC BETWEEN BUSBAR
- OPERATING TEMPERATURE:-40°C~+125°C
- Bonding material: PI High-Temperature resistant double sided adhesive insulation,
Adhesive force: 450-600kgf/25mm,forward pulling force 5-8kgf,
High Temperature resistance≥ 150 °C, Insulation Resistance ≥3000VDC;
- M4 NUT TORQUE 2.4Nm MAX.
- ALL EDGES WILL BE DEBURRED AND FREE OF SHARP EDGES.

NO.	MATERIAL	Quantity
1	C1100 H02,THICKNESS 5.0+0/-0.10MM, BLACK POWDER COAT	1
2	C1100 H02,THICKNESS 5.0+0/-0.10MM, BLACK POWDER COAT	1
3	SEE NOTE 4 FOR DETAILS.	1
4	SCREW_M4-11.2mm MATERIAL:SUS304 WITH SPRING	7
5	SCREW_M4-16.2mm MATERIAL:SUS304 WITH SPRING	1
6	WASHER: Ø5.2*Ø8.5*0.4mm, SUS304	8
7	BELLEVILLE: Ø5.2*Ø8*0.8mm, SUS304	8
8	Type E Clasp Carbon Steel 0.4*1.7*Ø2.0*Ø5.0	8

RoHS COMPLIANT	HALOGEN FREE	Unit:mm (inch)	PROJECTION 	JPC connectivity			
		GENERAL TOLERANCES: (UNLESS SPECIFIED)	D.R. 03/14/2025 Bovan			TITLE INNER 12V BUSBAR-RIGHT SIDE	PD./FILE NO. XXXXXXXXXX
		0 = ±1 (0.039)	CH.K 03/14/2025 Daniel	SCALE	SIZE	PART NO.	REV. 01
		0.0 = ±.5 (0.02)	APV.D 03/14/2025 Max	1:1	A4	67C2046-NY004T-H	SHEET 1 OF 1