

1			2		3		4		5		6		7		8		
			THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS—LINK PRODUCTS CO.,LTD.(JPC)				CUSTOMER DRAWING DRWC—009952				REV.	ECN NO.	DESCRIPTION		MDF'D	APP'D	DATE
											01		INITIAL DESIGN		Veera	Jason	02/02/2024
											A1		APPROVED DESIGN		Veera	Jason	06/12/2024

A

B

C

D

E

F

A


B

C

D

E

F

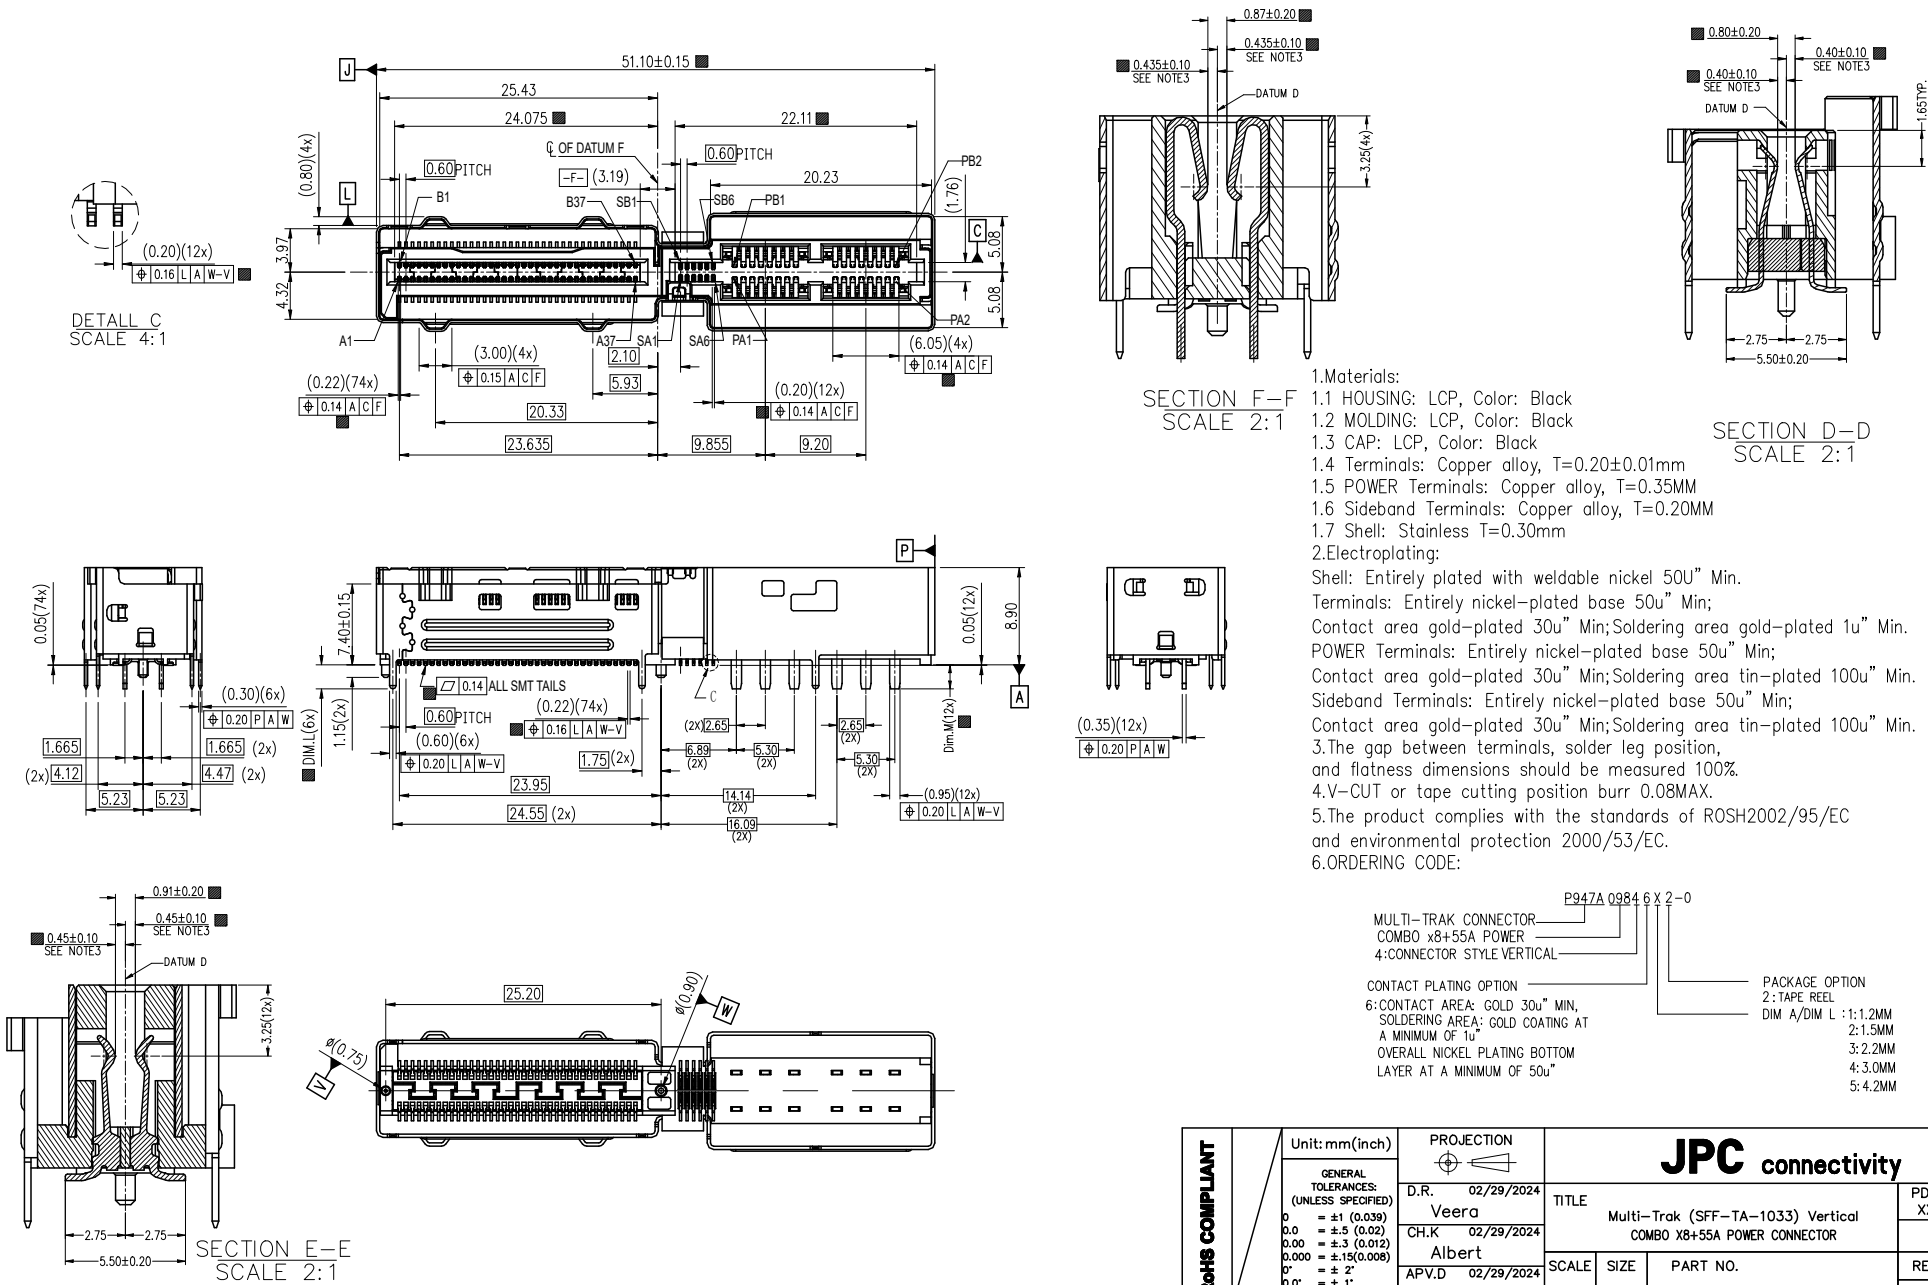

RoHS COMPLIANT	Unit: mm(inch)	PROJECTION	JPC connectivity		
	GENERAL TOLERANCES: (UNLESS SPECIFIED)	D.R. 02/29/2024 Veera	TITLE Multi-Trak (SFF-TA-1033) Vertical COMBO X8+55A POWER CONNECTOR	PD./FILE NO. XXXXXXXXXX	
	0 = ±1 (0.039) 0.0 = ±1.5 (0.02) 0.00 = ±1.3 (0.012) 0.000 = ±1.15 (0.006) 0" = ±2" 0.0" = ±1"	CH.K 02/29/2024 Albert		X-XXXX	
		APV.D 02/29/2024 Jason	SCALE 1:1	SIZE A4	PART NO. P947A09846X2-0
					REV. A1 SHEET 1 OF 3

1			2		3		4		5		6		7		8		
			THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS—LINK PRODUCTS CO.,LTD.(JPC)	CUSTOMER DRAWING DRWC—009952					REV.	ECN NO.	DESCRIPTION		MDF'D	APP'D	DATE		
									01		INITIAL DESIGN		Veera	Jason	02/02/2024		
									A1		APPROVED DESIGN		Veera	Jason	06/12/2024		

THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.(JPC)

CUSTOMER DRAWING
DRWC-009952

REV.	ECN NO.	DESCRIPTION	MDF'D	APP'D	DATE
01		INITIAL DESIGN	Veera	Jason	02/02/2024
A1		APPROVED DESIGN	Veera	Jason	06/12/2024

A



B

C



D

E

F

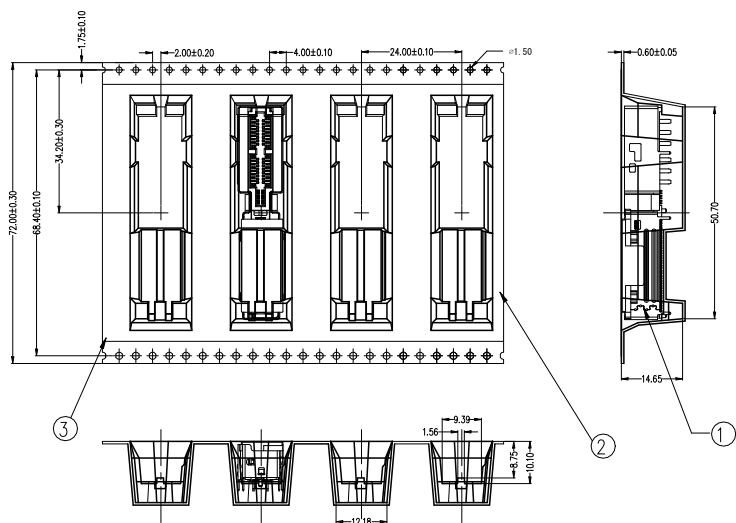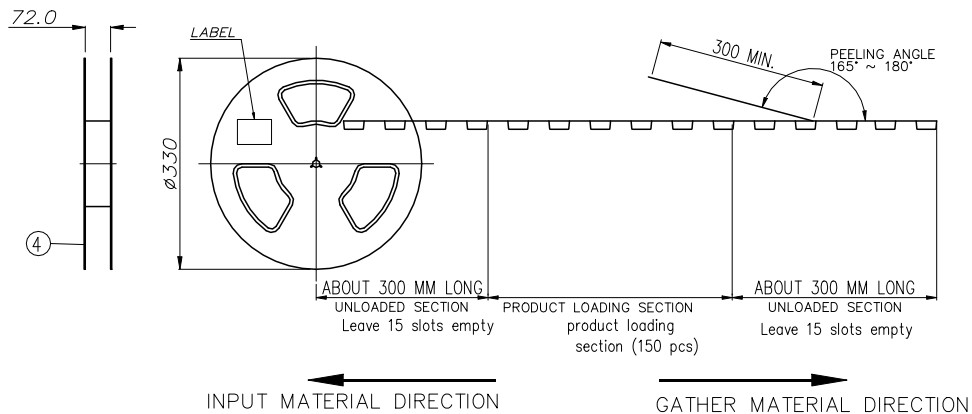

9	2 PCS	EPE 310X310X10[MM]
8	1 PCS	K=K CARD BOARD BOX INNER DIA 350X350X325[MM]
7	1 PCS	WATER PROOF BARG 700X550X0.08mm PE COLOURLESS TRANSPARENT
6	4 PCS	A=B 402X285X6.0
5	2 PCS	DESSICANT 10g/PACK
4	4 ROLLS/BOX	PS 330X100X72[MM] BLUE
3	—	PET,W61.5XT0.058[MM],TRANSPARENT
2	4 ROLLS/BOX	MULTI TRACK VT 8X_55A TAPE REEL
1	150/ROLLS&600/BOX	MULTI TRACK VT 8X_55A CONN
S/N	QUANTITY (PCS)	MATERIAL NAME

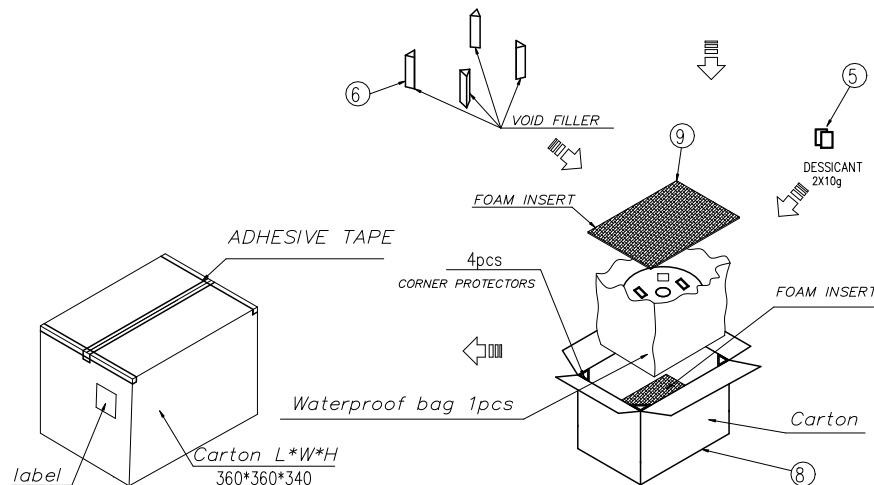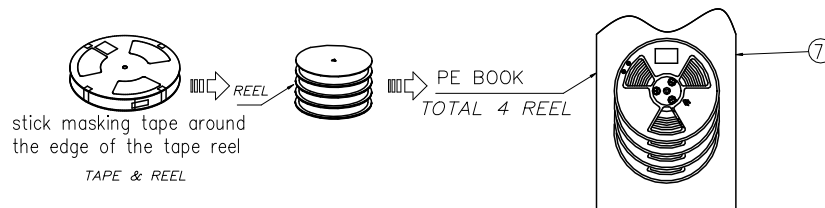

- 1.Load 1 product per slot in the carrier tape, leaving the first 15 slots (inner circle) and last 15 slots (outer circle) empty. A full roll has 150pcs with a 300mm lead tape minimum.
- 2.Use a 13-inch ($\varnothing 330$ mm) tape reel for packaging, affixing a label at a designated spot.
- 3.Insert a PE bag into the outer box, place the reel inside the PE bag (label side up), and fill each box with 5 reels. Add a foam piece at the top and bottom inside the box, two desiccant packets in the PE bag, corner protectors on the box, then seal the PE bag and box with an "I" pattern seal and attach the corresponding label on the box front.
- 4.Full box contains 600PCS = 1 box (4 reels per box, 150PCS per reel).
- 5.Cover tape peeling strength: 20gf~130gf at 300mm/min.

RoHS COMPLIANT	Unit:mm(inch)	PROJECTION	JPC connectivity		
	GENERAL TOLERANCES: (UNLESS SPECIFIED)	D.R. 02/29/2024 Veera	TITLE Multi-Trak (SFF-TA-1033) Vertical COMBO X8+55A POWER CONNECTOR	PD./FILE NO. XXXXXXXXXX	
	0 = ± 1 (0.039) 0.0 = ± 0.5 (0.02) 0.00 = ± 0.3 (0.012) 0.000 = ± 0.15 (0.006) 0" = $\pm 2'$ 0.0" = $\pm 1'$	CH.K 02/29/2024 Albert		X-XXXX	
		APV.D 02/29/2024 Jason	SCALE 1:1	SIZE A4	PART NO. P947A09846X2-0
			REV. A1 SHEET 3 OF 3		