



1	2		3	4	5	6	7	8				
THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JPC connectivity Inc.(JPC)					CUSTOMER DRAWING		REV.	ECN NO.	DESCRIPTION	MDF'D	APP'D	DATE
							01		INITIAL DESIGN	YANG	DENG	18/06/2025
							02					
							03					

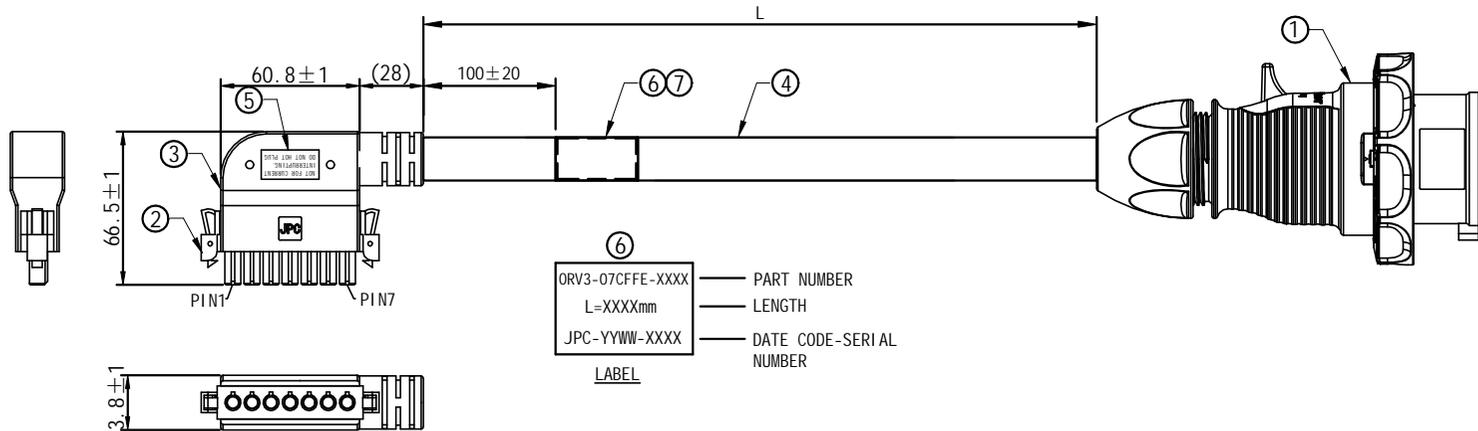

⑥  
 ORV3-07CFFE-XXXX — PART NUMBER  
 L=XXXXmm — LENGTH  
 JPC-YYWW-XXXX — DATE CODE-SERIAL NUMBER  
 LABEL

AC INPUT PAIR 1	PIN1	BROWN — L1
	PIN2	BLUE — N
AC INPUT PAIR 2	PIN3	BLACK — L2
PROTECTIVE EARTH	PIN4	YELLOW/GREEN — G
AC INPUT PAIR 2	PIN5	
AC INPUT PAIR 3	PIN6	GRAY — L3
	PIN7	

THE WIRING DIAGRAM

P/N	DESCRIPTION	L
ORV3-07CFFE-2100	ORV3 Series, AC Whip Overmolded Cable, 200-240/346-415 VAC, 32A, ORV3 AC Female Connector, Right Angle, H07RN-F 6 mm <sup>2</sup> Cable, IEC 60309 Plug, L=2100mm	2100 <sup>+40</sup> <sub>0</sub>
ORV3-07CFFE-3000	ORV3 Series, AC Whip Overmolded Cable, 200-240/346-415 VAC, 32A, ORV3 AC Female Connector, Right Angle, H07RN-F 6 mm <sup>2</sup> Cable, IEC 60309 Plug, L=3000mm	3000 <sup>+60</sup> <sub>0</sub>
ORV3-07CFFE-3200	ORV3 Series, AC Whip Overmolded Cable, 200-240/346-415 VAC, 32A, ORV3 AC Female Connector, Right Angle, H07RN-F 6 mm <sup>2</sup> Cable, IEC 60309 Plug, L=3200mm	3200 <sup>+60</sup> <sub>0</sub>
ORV3-07CFFE-3800	ORV3 Series, AC Whip Overmolded Cable, 200-240/346-415 VAC, 32A, ORV3 AC Female Connector, Right Angle, H07RN-F 6 mm <sup>2</sup> Cable, IEC 60309 Plug, L=3800mm	3800 <sup>+70</sup> <sub>0</sub>
ORV3-07CFFE-4300	ORV3 Series, AC Whip Overmolded Cable, 200-240/346-415 VAC, 32A, ORV3 AC Female Connector, Right Angle, H07RN-F 6 mm <sup>2</sup> Cable, IEC 60309 Plug, L=4300mm	4300 <sup>+80</sup> <sub>0</sub>

ITEM	SUPL	SUPL PN	DESCRIPTION	Q'TY
8				
7	/	/	HEAT SHRINK TUBE TRANSPARENT	1 PCS
6	/	/	LABEL WHITE	1 PCS
5	/	/	LABEL YELLOW	2 PCS
4	/	/	H07RN-F 5*6MM2 CABLE	A/R
3	/	/	THERMOPLASTIC BLACK	A/R
2	/	/	OCF ORV3 UNIVERSAL AC FEMALE CONNECTOR	1 PCS
1	/	/	IEC 60309 PLUG	1 PCS

**RoHS COMPLIANT**

Unit:mm(inch)

GENERAL TOLERANCES: (UNLESS SPECIFIED)  
 0 =±1 (0.039)  
 0.0 =±.5 (0.02)  
 0.00 =±.3 (0.012)  
 0.000=±.15(0.006)  
 0° =± 2°  
 0.0° =± 1'

**PROJECTION**

D.R.

CH.K

APV.D

**JPC connectivity Inc.**

TITLE: OCP ORV3 AC Whip Overmolded Cable

SCALE: N.T.S.

SIZE: A4

PART NO.: ORV3-07CFFE-XXXX

PD./FILE NO.: XXXXXXXXX

REV.: 01

SHEET 1 OF 1