


1	2		3	4	5	6	7	8			
THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JPC connectivity Inc.(JPC)				CUSTOMER DRAWING		REV.	ECN NO.	DESCRIPTION	MDF'D	APP'D	DATE
						01		INITIAL DESIGN	YANG	DENG	13/06/2025
						02		THE UL817 CERTIFICATION HAS BEEN NEWLY ADDED	YANG	DENG	18/11/2025
						03					

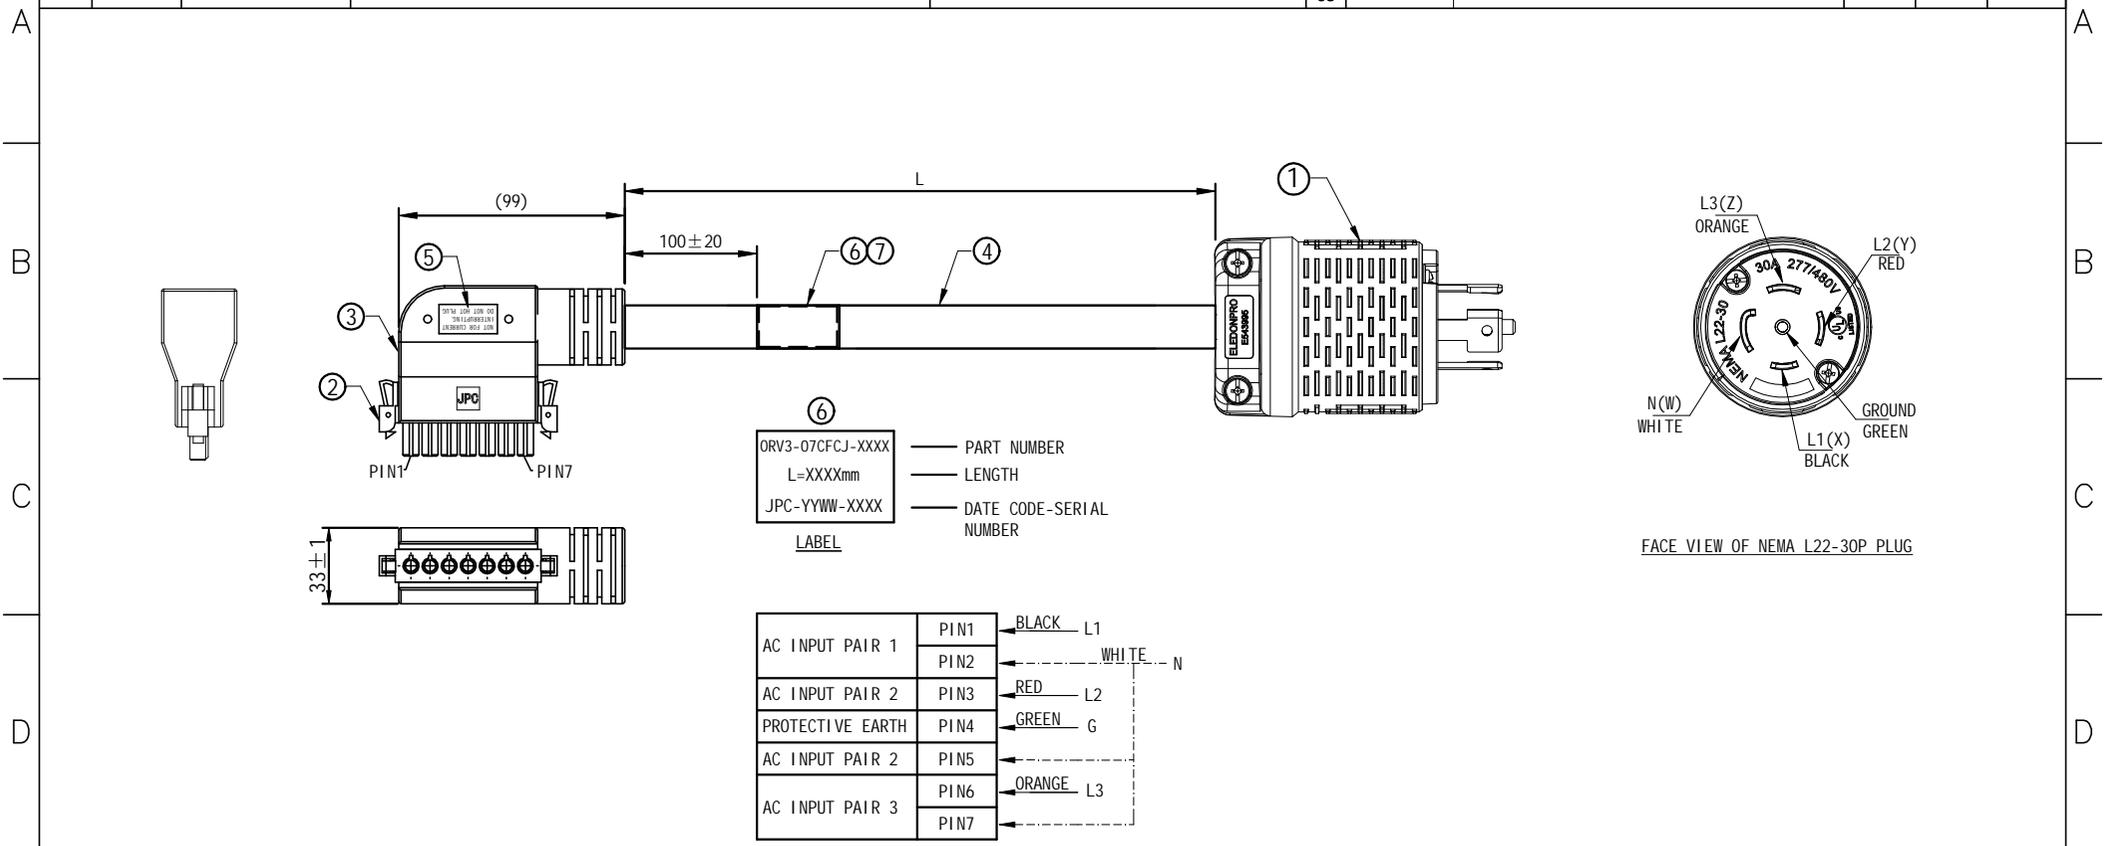

UL817 Approval : File No. E548739

P/N	DESCRIPTION	L
ORV3-07CFCJ-1600	ORV3 Series, AC Whip Overmolded Cable, 277/480 VAC, 30A, ORV3 AC Female Connector, Right Angle, SOOW 8 AWG Cable, NEMA L22-30P Plug, L=1600mm	1600 ⁺³⁰ ₋₀
ORV3-07CFCJ-2700	ORV3 Series, AC Whip Overmolded Cable, 277/480 VAC, 30A, ORV3 AC Female Connector, Right Angle, SOOW 8 AWG Cable, NEMA L22-30P Plug, L=2700mm	2700 ⁺⁵⁰ ₋₀
ORV3-07CFCJ-3000	ORV3 Series, AC Whip Overmolded Cable, 277/480 VAC, 30A, ORV3 AC Female Connector, Right Angle, SOOW 8 AWG Cable, NEMA L22-30P Plug, L=3000mm	3000 ⁺⁶⁰ ₋₀
ORV3-07CFCJ-3800	ORV3 Series, AC Whip Overmolded Cable, 277/480 VAC, 30A, ORV3 AC Female Connector, Right Angle, SOOW 8 AWG Cable, NEMA L22-30P Plug, L=3800mm	3800 ⁺⁷⁰ ₋₀
ORV3-07CFCJ-4500	ORV3 Series, AC Whip Overmolded Cable, 277/480 VAC, 30A, ORV3 AC Female Connector, Right Angle, SOOW 8 AWG Cable, NEMA L22-30P Plug, L=4500mm	4500 ⁺⁹⁰ ₋₀

7	/	/	HEAT SHRINK TUBE TRANSPARENT	1	PCS	RoHS COMPLIANT Unit:mm(inch) GENERAL TOLERANCES: (UNLESS SPECIFIED) 0 ±±1 (0.039) 0.0 ±±.5 (0.02) 0.00 ±±.3 (0.012) 0.000±±.15(0.006) 0° ±± 2' 0.0° ±± 1'		JPC connectivity Inc.		PD./FILE NO. XXXXXXXXX			
6	/	/	LABEL WHITE	1	PCS					TITLE OCP ORV3 AC Whip Overmolded Cable		X-XXXX	
5	/	/	LABEL YELLOW	2	PCS			CH.K		SCALE N.T.S.		SIZE A4	
4	/	/	SOOW 5*8AWG CABLE	A/R				APV.D		PART NO. ORV3-07CFCJ-XXXX		REV. 02	
3	/	/	THERMOPLASTIC BLACK	A/R								SHEET 1 OF 1	
2	/	/	OCP ORV3 UNIVERSAL AC FEMALE CONNECTOR	1	PCS								
1	/	/	NEMA L22-30P PLUG	1	PCS								
ITEM	SUPL	SUPL	PN	DESCRIPTION		Q'TY							