

TITLE 25Gb/s SFP28 DWDM 20km Transceivers	DOC No. RFD-20260612100-003	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.12	CLASSIFICATION : Optical Transceiver

1. Product Features

- Operating data rate up to 25.78Gbps
- Up to 20km (APD) transmission directly
- 100 GHz ITU channel spacing with integrated wavelength locker
- DWDM EML Laser and APD receiver
- LC duplex connector
- Hot pluggable 20pin connector
- Low power consumption
Industrial <2.3W
- Single +3.3V±5% power supply
- Compliant with SFF-8472
- Fully RoHS Compliant
- Case operating temperature
Industrial: -40°C to +85°C

2. Product Applications

- 25GE BASE-ER Ethernet
- CPRI Option 10/eCPRI

3. Product Description

This Transceiver is intended for 20km (APD) reach service from 24.33Gb/s to 25.78Gb/s DWDM D17~D61 single mode high-speed communications equipment where low-cost, extraordinary performance and reliability are essential. It consumes low power, operates base on 3.3V DC power supply and is offered in the industrial temperature range. They are compliant with SFP28 MSA, SFF-8431 and SFF-8432. This module is designed for single mode fiber and operates at a nominal wavelength of 100GHz ITU Grid, C Band DWDM wavelength.

The low jitter and low bit error rate optical assembly features a D17~D61 EML laser transmitter and APD receiver. It utilizes internal clock and data recovery (CDR) units on transmitter and the receiver chains for low jitter compliance. The differential AC coupled Tx and Rx data interfaces are CML compatible. The device is Class I laser safety compliant.

TITLE 25Gb/s SFP28 DWDM 20km Transceivers	DOC No. RFD-20260612100-003	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.12	CLASSIFICATION : Optical Transceiver

3.1 DIMENSIONS, MATERIALS, PLATINGS AND MARKING

3,1 PRODUCT NAME AND SERIES NUMBER(S)

25G SFP28 DWDM 20km Transceivers

JPC P/N	Laser(nm)	Power	Sensitivity	Distance	Fiber Type	Connector	Tem.
P58**0CRIZ20xx	DWDM	-2~5dBm	-19dBm	20km	SMF	LC	I


Note-1: ** Indicates the customer code.

*Note-2:*xx is the channel number ex P58260CRIZ2018 is Channel C18 wavelength 1563.05nm

Channel	Wavelength (nm)			
	C18 (1563.05nm)	C19 (1562.23nm)	C20 (1561.41nm)	C21 (1560.61nm)
Wavelength (nm)	Wavelength (nm)	Wavelength (nm)	Wavelength (nm)	Wavelength (nm)
C22 (1559.79nm)	C23 (1558.98nm)	C24 (1558.17nm)	C25 (1557.36nm)	C26 (1556.55nm)
Wavelength (nm)	Wavelength (nm)	Wavelength (nm)	Wavelength (nm)	Wavelength (nm)
C27 (1555.75nm)	C28 (1554.94nm)	C29 (1554.13nm)	C30 (1553.33nm)	C31 (1552.52nm)
Wavelength (nm)	Wavelength (nm)	Wavelength (nm)	Wavelength (nm)	Wavelength (nm)
C32 (1551.72nm)	C33 (1550.92nm)	C34 (1550.12nm)	C35 (1549.32nm)	C36 (1548.51nm)
Wavelength (nm)	Wavelength (nm)	Wavelength (nm)	Wavelength (nm)	Wavelength (nm)
C37 (1547.72nm)	C38 (1546.92nm)	C39 (1546.12nm)	C40 (1545.32nm)	C41 (1544.53nm)
Wavelength (nm)	Wavelength (nm)	Wavelength (nm)	Wavelength (nm)	Wavelength (nm)
C42 (1543.73nm)	C43 (1542.94nm)	C44 (1542.14nm)	C45 (1541.35nm)	C46 (1540.56nm)
Wavelength (nm)	Wavelength (nm)	Wavelength (nm)	Wavelength (nm)	Wavelength (nm)
C47 (1539.77nm)	C48 (1538.98nm)	C49 (1538.19nm)	C50 (1537.40nm)	C51 (1536.61nm)
Wavelength (nm)	Wavelength (nm)	Wavelength (nm)	Wavelength (nm)	Wavelength (nm)
C52 (1535.82nm)	C53 (1535.04nm)	C54 (1534.25nm)	C55 (1533.47nm)	C56 (1532.68nm)
Wavelength (nm)	Wavelength (nm)	Wavelength (nm)	Wavelength (nm)	Wavelength (nm)
C57 (1531.90nm)	C58 (1531.12nm)	C59 (1530.33nm)	C60 (1529.55nm)	C61 (1528.77nm)

TITLE 25Gb/s SFP28 DWDM 20km Transceivers	DOC No. RFD-20260612100-003	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.12	CLASSIFICATION : Optical Transceiver

3.2 DIMENSIONS, MATERIALS, PLATINGS AND MARKING

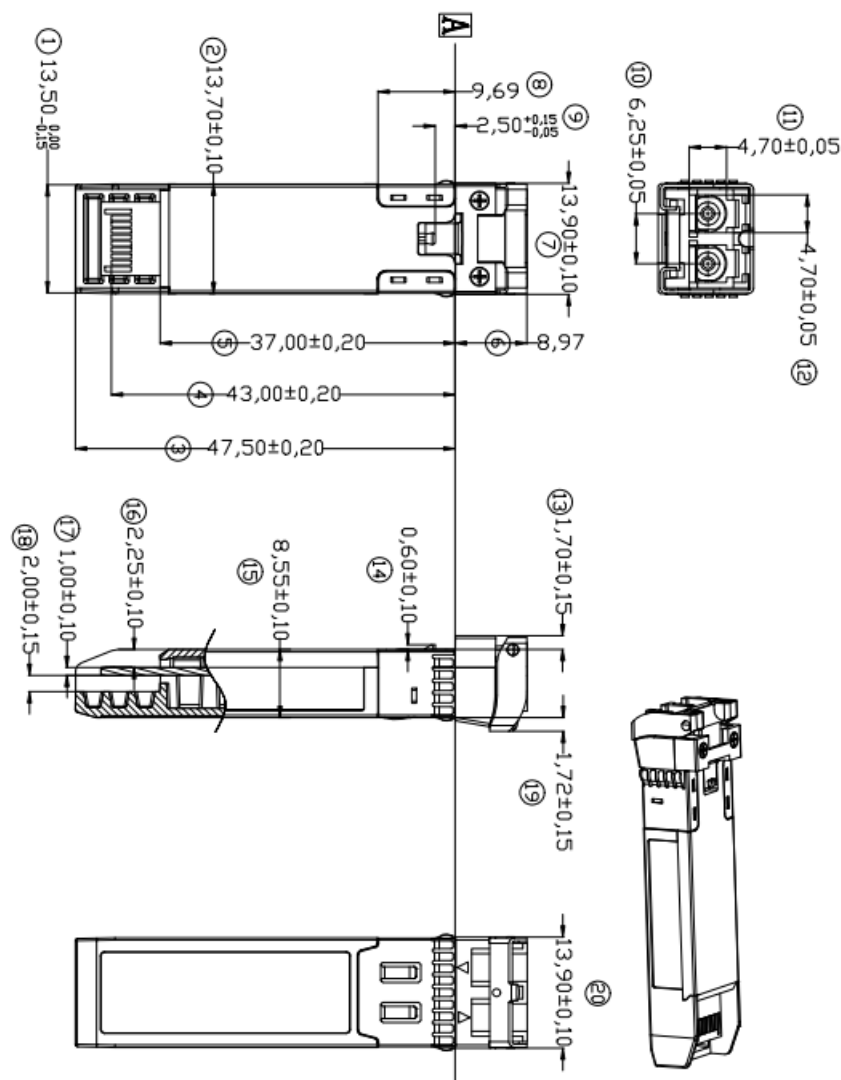

Unit is millimeter. All dimensions are ± 0.1 mm unless otherwise specified

TITLE 25Gb/s SFP28 DWDM 20km Transceivers	DOC No. RFD-20260612100-003	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.12	CLASSIFICATION : Optical Transceiver

4. AbsoluteMaximum Ratings

Parameter	Symbol	Unit	Min	Max
Storage Temperature Range	Ts	°C	-40	85
Relative Humidity	RH	%	0	95
Maximum Supply Voltage	Vcc	V	-0.5	4.0

5. Recommended Operating Conditions

Parameter	Symbol	Unit	Min	Typ	Max
Power Supply Voltage	Vcc	V	3.14	3.3	3.46
Bit Rate	BR	Gb/s		25.78	
Bit Error Ratio	BER				5*10 ⁻⁵

6. Electrical Characteristics

Parameter	Symbol	Unit	Min	Typ	Max	Note
Supply Voltage	V _{CC}	V	3.14	3.3	3.46	
Power consumption	P	mW			2300	I-temp
Transmitter						
Input Differential Impedance	R _{IN}	Ω		100		
Single-ended Data Input Swing	V _{IN}	mVp-p	90		450	
Transmit Disable Voltage	V _{DIS}	V	2		V _{CCHOST}	
Transmit Enable Voltage	V _{EN}	V	V _{EE}		V _{EE} +0.8	
Transmit Fault Assert Voltage	V _{FA}	V	2		V _{CCHOST}	
Transmit Fault De-Assert Voltage	V _{FDA}	V	V _{EE}		V _{EE} +0.4	
Receiver						
Single-ended Data Output Swing	V _{OD}	mVp-p	200		450	
LOS Fault	V _{LOSFT}	V	2		V _{CCHOST}	
LOS Normal	V _{LOSNR}	V	V _{EE}		V _{EE} +0.4	

TITLE 25Gb/s SFP28 DWDM 20km Transceivers	DOC No. RFD-20260612100-003	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.12	CLASSIFICATION : Optical Transceiver

7. Optical Characteristics (V_{cc}= 3.14 to 3.46V)


Parameter	Symbol	Unit	Min	Typ	Max	Note
Transmitter						
Nominal Wavelength	λ_C	nm	1528.77~1563.86			
Center Wavelength Spacing		GHz	100			
Wavelength Tolerance		nm	-0.2		0.2	
Average Output Power	P _{av}	dBm	-2		5	
Spectral Width (-20dB)	σ	nm			1	
Extinction Ratio	ER	dB	6			
Side Mode Suppression Ratio	SMSR	dB	30			
Transmitter and Dispersion Penalty	TDP	dB			5	
Average Launch Power of OFF Transmitter	POFF	dBm			-30	
Relative Intensity Noise	RIN	dB/Hz			-128	
Receiver (APD/TIA)						
Center Wavelength	λ_C	nm	1260		1620	
Receiver Sensitivity(OMA)	RSENSE	dBm			-19	1
Receiver Overload (OMA)	P _{max}	dBm	-7			
Optical Return Loss		dB			-26	
LOS Assert	LOSA	dBm	-35			
LOS De-Assert LOS	LOSD	dBm			-24	
LOS Hysteresis		dB	0.5			

Note1: Measured at 25.78125Gb/s, ER>=6dBm, PRBS 2³¹-1 and BER better than or equal to 5E-5;

TITLE 25Gb/s SFP28 DWDM 20km Transceivers	DOC No. RFD-20260612100-003	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.12	CLASSIFICATION : Optical Transceiver

8. Applications Note:

Pin Definitions

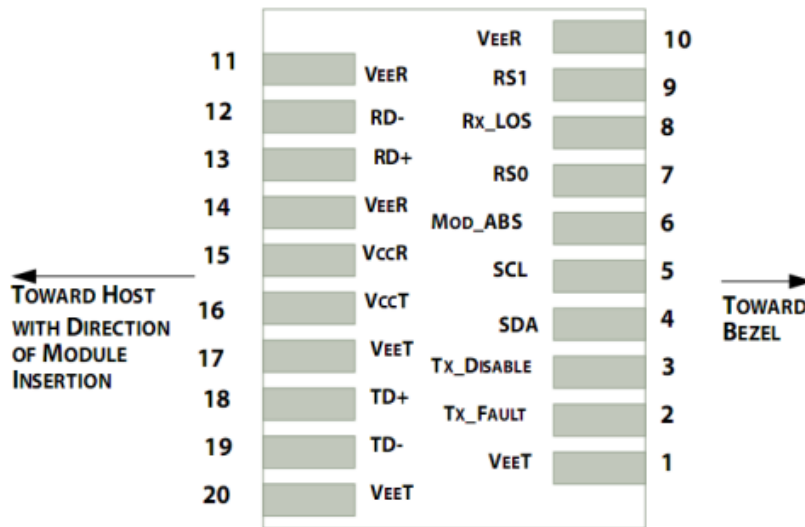

Pin Function Definitions

Pin Number	Symbol	Name	Description
1,17,20	VeeT	Transmitter Signal Ground	Connected to signal ground on the host board.
2	TX Fault	Transmitter Fault Out (OC)	Module transmitter fault output.
3	TX Disable	Transmitter Disable In (LVTTL)	Module transmitter disable control.
4	SDA	Module Definition Identifiers	Serial ID with SFF 8472 Diagnostics
5	SCL		Module Definition pins should be pulled up to Host Vcc with 10 kΩ resistors.
6	MOD-ABS		
7	RS0	Receiver Rate Select (LVTTL)	Rate select 0(Rx):Low=CDR Bypass ; High=CDR Select
9	RS1	Transmitter Rate Select (LVTTL)	Rate select 1(Tx):Low=CDR Bypass ; High=CDR Select
8	LOS	Loss of Signal Out (OC)	Receiver loss of signal.
10,11,14	VeeR	Receiver Signal Ground	Connected to signal ground on the host board.
12	RD-	Receiver Negative DATA Out (CML)	Receiver inverted data output, internally AC coupled and terminated

- Transceiver temperature
- Laser bias current

TITLE 25Gb/s SFP28 DWDM 20km Transceivers	DOC No. RFD-20260612100-003	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.06.12	CLASSIFICATION : Optical Transceiver

- Transmitted optical power
- Received optical power
- Transceiver supply voltage

It also provides a sophisticated system of alarm and warning flags, which may be used to alert end -users when particular operating parameters are outside of a factory-set normal range. The operating and diagnostics information is monitored and reported by a Digital Diagnostics Transceiver Controller (DDTC) inside the transceiver, which is accessed through the 2-wire serial interface. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially. The 2-wire serial interface provides sequential or random access to the 8 bit parameters, addressed from 0x00h to the maximum address of the memory. For more detailed information, including memory map definitions, please refer the SFF-8472 documentation.

11. Digital Diagnostic Monitor Accuracy

The following characteristics are defined over recommended operating conditions

Parameter	Accuracy	Unit
Internally measured transceiver temperature	+/-3	deg.C
Internally measured transceiver supply voltage	+/-3	%
Measured Tx bias current	+/-10	%
Measured Tx output power	+/-3	dB
Measured Rx received average optical power	+/-3	dB

12. Modification History

Rev.	Comments	Date	Originator	Approval
01	Initial	2026.06.12	Hawk Rong	Mike Sun