





THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HERewith IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.

CUSTOMER DRAWING






REV.	DESCRIPTION	MDF'D	APP'D	DATE
A1	INITIAL DESIGN	Colin	Ray	08/14/2017
A2	MODIFY P/N MATRIX DESCRIPTION & PIN LENGTH	Colin	Ray	11/03/2017



- NOTE:
- MATERIAL:  
HOUSING/CAP: HI-TEMP THERMOPLASTIC UL 94V-0 BLACK  
TERMINAL: COPPER ALLOY  
SHELL: STAINLESS STEEL
  - PLATING:  
TERMINAL: CONTACT & SOLDER AREA SEE JPC P/N MATRIX  
30u" MIN. NICKEL UNDERPLATE ALL OVER  
SHELL: MATTE TIN OVER 30u" MIN. 30u" MIN. NICKEL UNDERPLATE ALL OVER
  - DATE CODE: YYWW  
YY=THE LAST 2 DIGITS OF THE YEAR  
WW=WEEK OF MANUFACTURE  
D=DAY FOR WEEK
  - PACKAGE SPEC : SOP-PK-P931F042-D
  - JPC P/N MATRIX: P 9 3 1 F 0 4 2 \* \* B R - 0

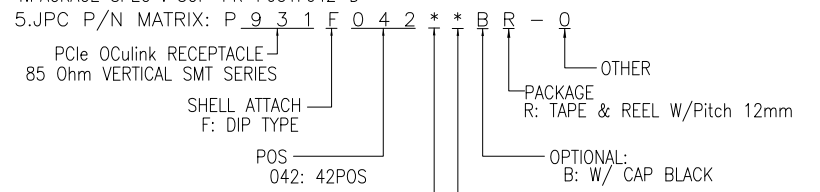

- PLATING
- MATING -15u" Au & G/F SOLDER AREA
  - MATING -30u" Au & G/F SOLDER AREA
- TAIL LENGTH=DIM "L"
- DIP, L=3.0mm(For PCB:2.4-2.8mm)
  - DIP, L=2.1mm(For PCB:1.5-1.9mm)
  - DIP, L=3.7mm(For PCB:3.1-3.5mm)

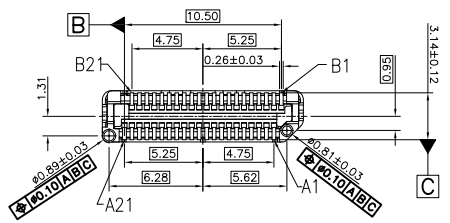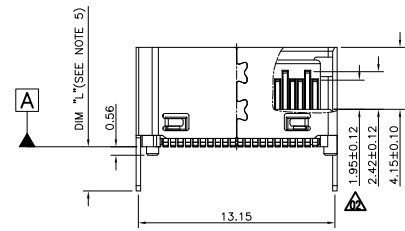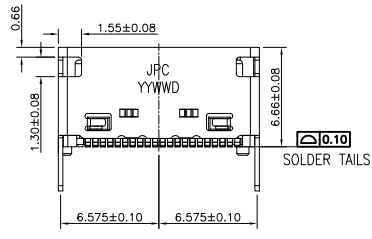



<b>RoHS COMPLIANT</b>	<b>HALOGEN FREE</b>	Unit : mm	PROJECTION		<b>JPC JESS-LINK PRODUCTS CO., LTD.</b>		
		GENERAL TOLERANCES: (UNLESS SPECIFIED)	D.R.	11/03/2017	TITLE	PCle OCulink X4 CONN.	PRODUCT NO. /LAYOUT
		0 = ±.30	Colin		(85 Ohm, REC. V/T, SMT, H=6.66mm)	C15H0320C	
		0.0 = ±.20	CH.K	11/03/2017	SCALE	SIZE	DWG NO.
0.00 = ±.10	Andrew		2:1	A4	SD-P931F042-D	SHEET 1 OF 2	
0.000 = ±.05	APV.D	11/03/2017					
0" = ±.1"	Ray						
0.0" = ±.50"							

THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.

CUSTOMER DRAWING



REV.	DESCRIPTION	MDF'D	APP'D	DATE
A1	INITIAL DESIGN	Colin	Ray	08/05/2017
A2	MODIFY P/N MATRIX DESCRIPTION & PIN LENGTH	Colin	Ray	11/03/2017

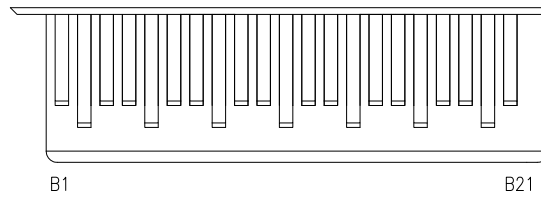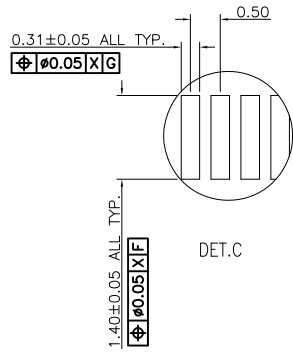

42 CIRCUITS TOP SIDE MATING LEVEL

PIN NO.	MATING LEVEL	PIN NO.	MATING LEVEL
A1	2nd	B1	2nd
A2	1nd	B2	1nd
A3	2nd	B3	2nd
A4	2nd	B4	2nd
A5	1nd	B5	1nd
A6	2nd	B6	2nd
A7	2nd	B7	2nd
A8	1nd	B8	1nd
A9	2nd	B9	2nd
A10	2nd	B10	2nd
A11	1nd	B11	1nd
A12	2nd	B12	2nd
A13	2nd	B13	2nd
A14	1nd	B14	1nd
A15	2nd	B15	2nd
A16	2nd	B16	2nd
A17	1nd	B17	1nd
A18	2nd	B18	2nd
A19	2nd	B19	2nd
A20	1nd	B20	1nd
A21	2nd	B21	2nd

DATUM X  
 (TOP OF PCB)

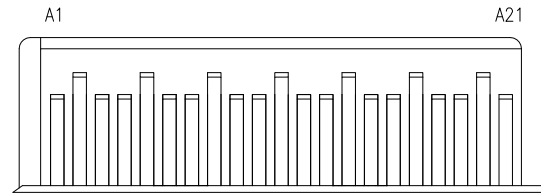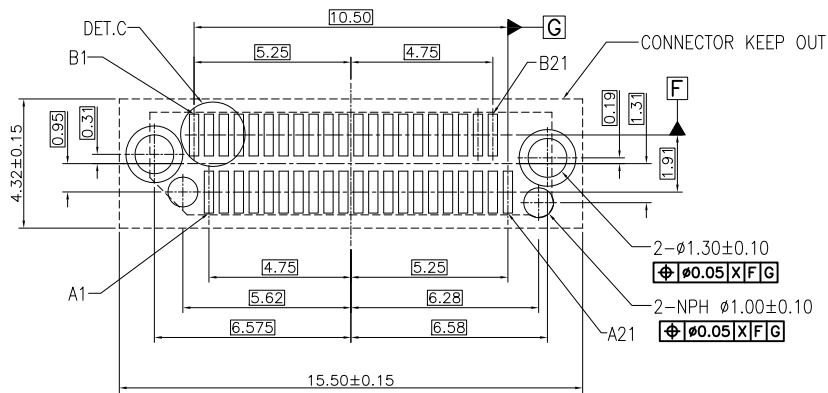

42 CIRCUITS BOTTOM SIDE MATING LEVEL

RECOMMENDED PCB LAYOUT

<b>RoHS COMPLIANT</b>	<b>HALOGEN FREE</b>	Unit : mm	PROJECTION 	<b>JPC JESS-LINK PRODUCTS CO., LTD.</b>			
		GENERAL TOLERANCES: (UNLESS SPECIFIED) 0 = ±.30 0.0 = ±.20 0.00 = ±.10 0.000 = ±.05 0° = ± 1° 0.0° = ±.50°	D.R. 11/03/2017 Colin			TITLE PCle OCulink X4 CONN. (85 Ohm, REC. V/T, SMT, H=6.66mm)	PRODUCT NO. /LAYOUT C15H0320C
		CH.K 11/03/2017 Andrew	APV.D 11/03/2017 Ray	SCALE N/A	SIZE A4	DWG NO. SD-P931F042-D	REV. A2
							SHEET 2 OF 2